



CLASAR®

CHECK VALVE



SAPAG VALVES



FRENCH INDUSTRIAL
VALVE MANUFACTURER

2 Rue du Marais
80400 Ham, FRANCE


+33 (0)3 23 81 43 00
info@sapag-valves.com

www.sapag-valves.com



Performance	The maximum pressures and temperatures depend on the pressure/temperature ratio, materials, size (DN) and nature of the fluid.	
	Temperature, °C	-196 °C -30 °C 130 °C 700 °C
	Pressure, bar	0 50 100 bar
	Diameter, mm	DN32 DN80 DN1800
Technology	Non-return valve with very high dynamic response to avoid the water hammer: <ul style="list-style-type: none"> • Partial opening, • Silent running, • Compact design, • Virtually no wear and tear on the obturator • Fast closing due to short obturator motion (effective protection of the valve against pressure peaks and of the pumps against flow reversal) 	
Body type	  Wafer (DN80-500) Double flange (DN600 – 1800)	
Design Standard	EN16767 (out of face to face)	
Face to Face	Manufacturer Standard	
Body	The design of the diffuser is the direct result of hydraulic studies and tests, carried out in renowned laboratories. It provides effective guidance for the fluid with the same flow velocity in all valve sections. A complex part requiring a high level of quality, SAPAG VALVES has entrusted the production of the raw part to partners recognized for their high technicality. The sealing area is faultless, i.e. no repairs are permitted, which guarantees a homogeneous maintenance of the metallurgical properties.	
Counter flange (Wafer) or Real shell (Double Flange Version)	SAPAG VALVES applies the same quality requirements as for the body. It ensures precise guidance of the return spring. Its careful machining guarantees the external sealing of the valve.	
Obturator	Instantaneous dynamic response thanks to its density close to the fluid and its very short run. The hardness of the obturator takes into account the design of the sealing surfaces and conditions of use. It guarantees the maintenance of the properties of the valve's tightness over time. Static seals and absence of rubbing thanks to the floating design of the obturator limit or eliminate the need for periodic maintenance.	
Spring	The features are calculated to guarantee optimal performance of the valve. Its main function is to hold the valve on the sealing surfaces at zero differential pressure. It therefore avoids mixing upstream and downstream fluids. The material used is adapted and selected according to the fluid flowing through the valve. The spring in the standard version allows operation in systems with low line speeds, but also in systems with high deceleration (smooth operation).	


Dynamics Charecteristics

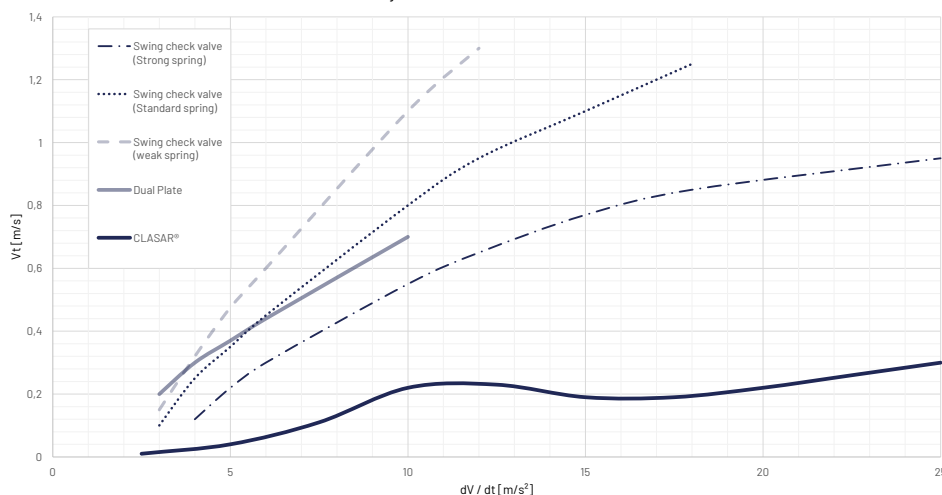


Part List

	Designation	Material *	Coating*	
1	Body	Ductile iron	EN-JS1020 (GJS400-15)	Epoxy
		Austenitic cast iron	EN-JS3011 / A439 D-2B	
		Stainless steel	1.4408 / A351 CF8M	
		Super Duplex	1.4469 PREN40 / A995 5A	
2	Counter Flange (2A) or Rear Shell (2B)	Ductile iron	EN-JS1020 (GJS400-15)	Epoxy
		Austenitic cast iron	EN-JS3011 / A439 D-2B	
		Stainless steel	1.4408 / A351 CF8M	
		Super Duplex	1.4469 PREN40 / A995 5A	
3	Obturator		Polyurethane	
			PTFE	
4	Spring	Stainless steel	1.4310 (equiv. AISI302)	
			AISI316	
			INCONEL X750	
5	O-Ring	EPDM		

(*)Others on request

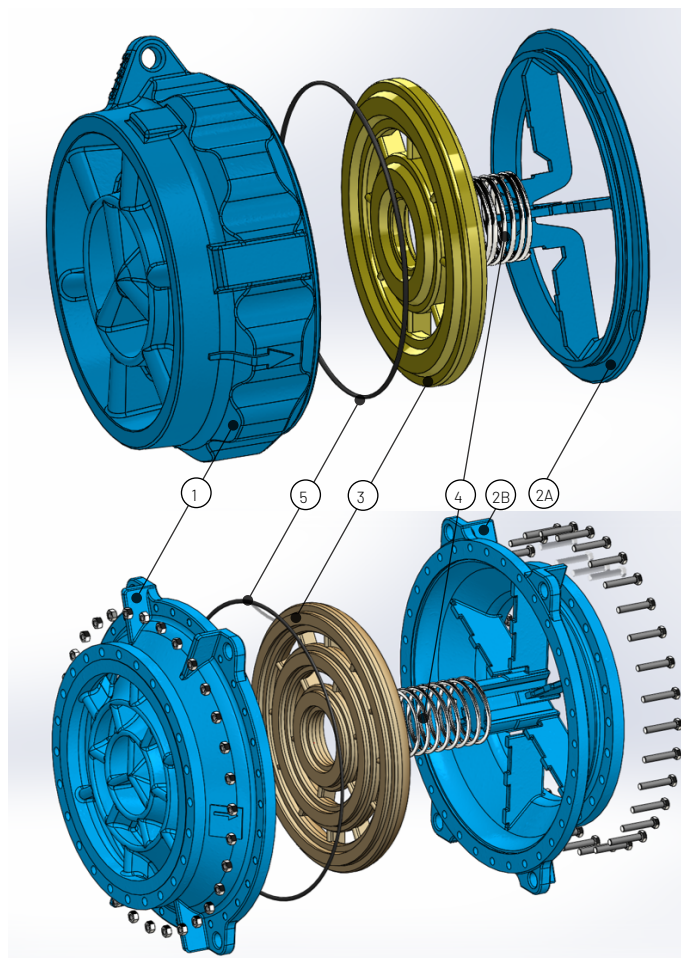

Deceleration (m/s²)

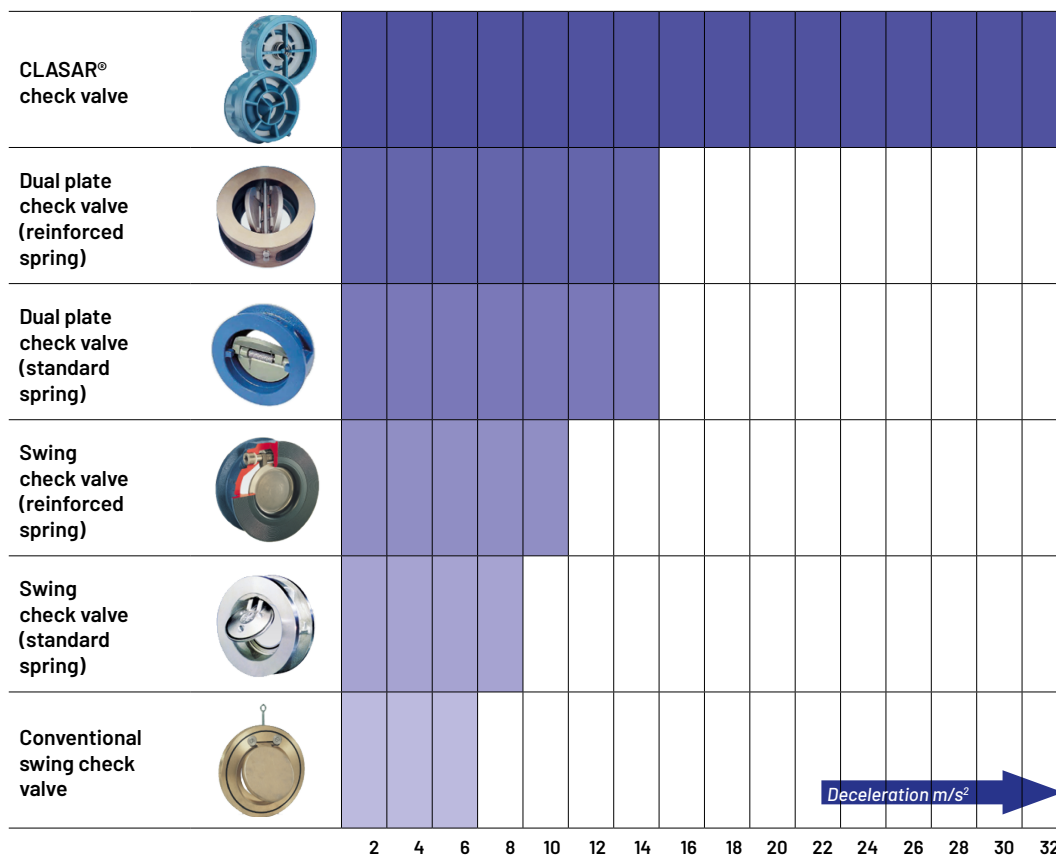

Range of use of the obturators

